
STIG XS SQUARE *Step light*

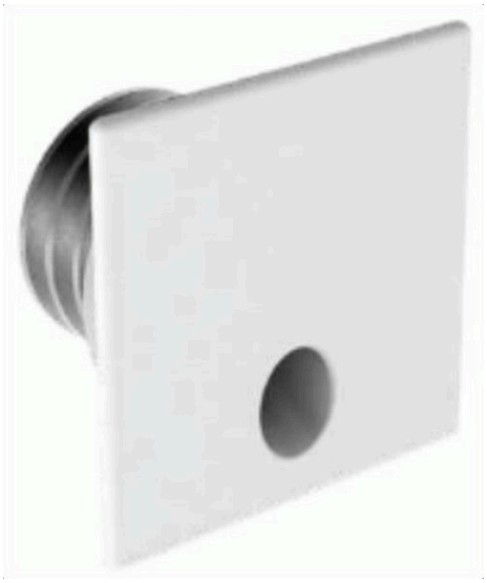

Fixed indoor spotlight for step light use. Suitable for lighting paths, corridors and stairs.

STEP LIGHT	IP 40 PROTECTION	CLASS III	2W POWER
2700K CCT	90 CRI	30° BEAM	Remote DRIVER

CONTROL DALI Casambi

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Wall-mounted
Power	2W
Colour temperature	2700K
Colour rendering (CRI)	90
Source flux	220lm

OPTICS

Emission	Fixed mini step light
LED source	LED Mid Power
Distribution	Asymmetric
Optics	Free
Beam angle	30°


ELECTRICAL

Driver	Remote
Power supply	Up to 700mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø38mm
Weight	60gr
Finish	Any RAL or NCS code
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

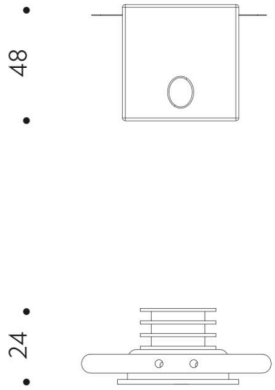

NOTES

- Remote driver to be selected according to architectural constraints and the number of spotlights to be controlled.
- DALI or Casambi dimmable.
- Custom galvanic finishes available, quoted separately.