LINEAR DOUBLE DOT TRACK L144 *Track projector*

Linear LED luminaire with a double row of light points for track installation. Not adjustable. Aluminium body. On-board driver.



TRACK | IP 20 PROTECTION | CLASS II | 4000K CCT

>90 CRI | 60–80° BEAM | Integrated DRIVER

CONTROL DALI

GENERAL

Category	Track projector
Environment	Indoor
IP rating	IP20
Installation	Electrified track
Power	50
Colour temperature	4000K
Colour rendering (CRI)	>90
Source flux	7000Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Lens
Beam angle	60°, 80°


ELECTRICAL

Driver	On board
Power supply	220-240VAC 50/60Hz
Insulation class	II

MECHANICAL

Dimensions	See drawing
Weight	2.170Kg
Finish	Black
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

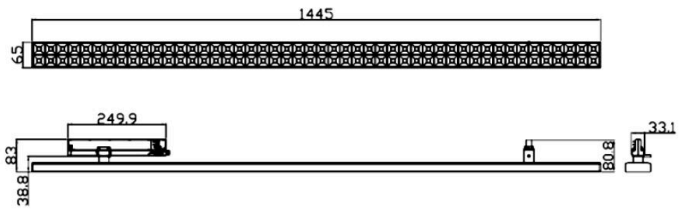

NOTES

- On/Off with integrated driver.
- DALI on request.
- Available in the following colour temperatures: 3000K, 4000K, 5000K.