
NOVASPIRIT MAG 1413 30° *Linear luminaire*

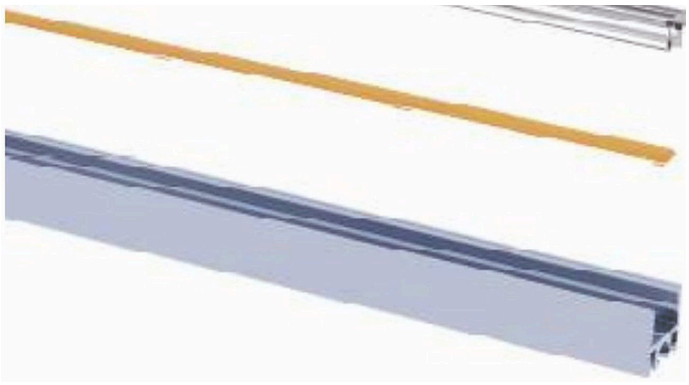

Fully customisable linear LED luminaire, recessed or flush-mounted in showcases, displays and furniture. Available in made-to-measure lengths. Continuous line light beam. Aluminium body, PMMA lens, direct light. High R9 value, for naturally saturated red colour rendering. Magnetic fixing available.

LINEAR	IP 20 PROTECTION	CLASS III	14W/m POWER
2700K CCT	90 CRI	30° BEAM	Remote DRIVER

CONTROL: DALI · Triac · 0-10V · Casambi

GENERAL

Category	Linear luminaire
Environment	Indoor
IP rating	IP20
Installation	Ceiling-mounted and recessed
Power	14W/m
Colour temperature	2700K
Colour rendering (CRI)	90
Source flux	1670lm/m

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric and asymmetric
Optics	PMMA lens
Beam angle	30°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.200Kg/m
Finish	Aluminium
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

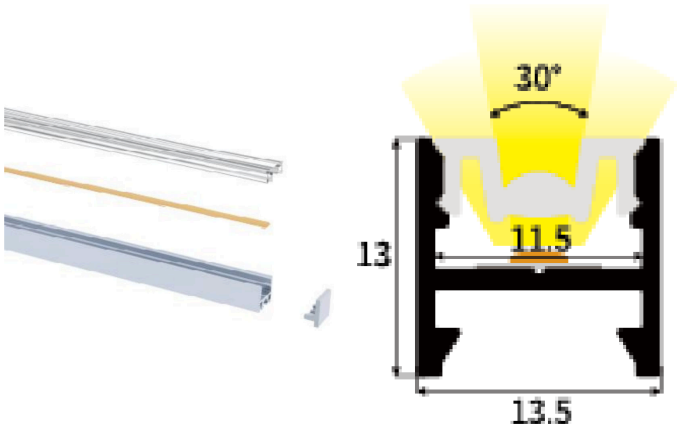

NOTES

- On/Off, Triac, DALI, 0-10V or Casambi with remote driver.
- Fixing with metal clips or magnets.