NOVA WASHER 7×1

Surface-mounted and magnetic lights



Wall washer LED luminaire for indoor installation, individually or in continuous rows, to light walls in both uplight and downlight. Designed for art galleries, museums or private installations, it combines efficiency and reliability. In-Out through wiring to speed up installation. DALI dimmable with integrated driver. Supplied with tilt adjustment bracket to optimise beam orientation.

SURFACE	IP 20 PROTECTION	CLASS I	16W POWER

3000K CCT	>90 CRI	Integrated DRIVER

CONTROL DALI

GENERAL

Category	LED
Environment	Indoor
IP rating	IP20
Installation	Suspension/ceiling
Power	16W
Colour temperature	3000K
Colour rendering (CRI)	>90
Source flux	1850lm

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Asymmetric
Optics	Linear lens/reflectors
Beam angle	Wall washer


ELECTRICAL

Driver	On board
Power supply	220 Vac
Insulation class	I

MECHANICAL

Dimensions	290x50x70mm (to be confirmed)
Weight	0.5 kg (to be confirmed)
Finish	RAL or NCS code
Material	Plastic/aluminium
Tilt	0/90°

TECHNICAL DRAWINGS AND DETAILS

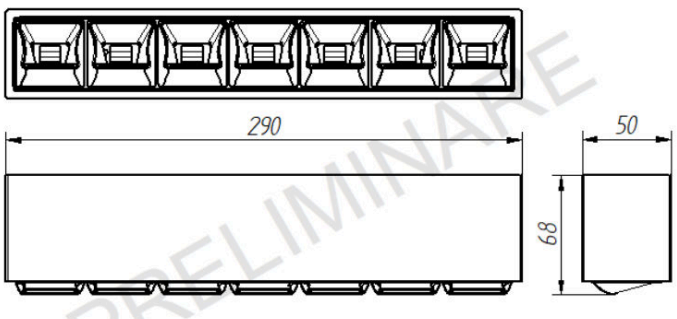

NOTES

- DALI dimmable
- All dimensions are to be confirmed through prototype analysis.