SAGITTARIUS B *EV panel*



650W LED softlight with variable white and colour, pixel control and effects (driven at 350W). Full RGB+W colour gamut with hue and saturation control. Direct light. On-board driver.

PROJECTOR	IP 20 PROTECTION	CLASS II	650W POWER
10000K CCT	110° BEAM	Integrated DRIVER	

CONTROL DMX

GENERAL

Category	EV panel
Environment	Indoor
IP rating	IP20
Installation	Custom bracket
Power	650W
Colour temperature	2700-10000K ± 100K
Colour rendering (CRI)	See reference table
Luminaire flux	See reference table

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Lens
Beam angle	110°


ELECTRICAL

Driver	On board
Power supply	220~240V~50/60Hz
Insulation class	II

MECHANICAL

Dimensions	See drawing
Weight	11.000Kg
Finish	Black
Material	Aluminium
Rotation	+/- 360°
Tilt	+/- 360°

TECHNICAL DRAWINGS AND DETAILS

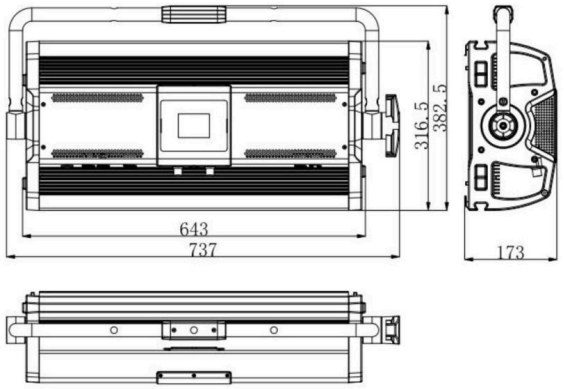

NOTES

- With integrated driver.
- Control modes: DMX512, RDM, app control, wifi-DMX, wireless DMX.
- Light modes: CCT, HSI, GEL, RGBCW, XY
- Dimming mode: 8-bit and 16-bit
- Dimming curve: 4 types
- Battery DC voltage: 48V