CANNON CYCLO ESTRA *Ceiling/wall LED projector*



Fully adjustable LED projector for ceiling/wall installation. Aluminium body. Direct light. On-board driver. Fully customisable.

SURFACE	IP 20 PROTECTION	CLASS II	25W POWER
3000K CCT	>90 CRI	38° BEAM	Integrated DRIVER

CONTROL · ON REQUEST DALI

GENERAL

Category	Ceiling/wall LED projector
Environment	Indoor
IP rating	IP20
Installation	Ceiling/wall
Power	25W
Colour temperature	3000K
Colour rendering (CRI)	>90
Source flux	3150Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	PMMA lens
Beam angle	38°

ELECTRICAL


Driver	On board
Power supply	220-240 VAC
Insulation class	II

MECHANICAL

Dimensions	See drawing
Finish	Any RAL or NCS code
Material	Aluminium
Rotation	350°
Tilt	+/- 90°

TECHNICAL DRAWINGS AND DETAILS



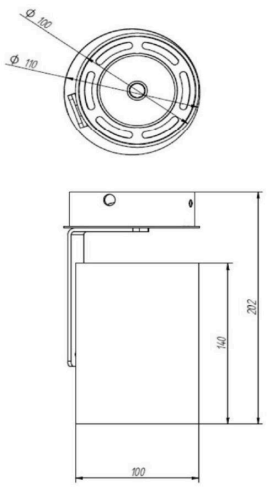

NOTES

- Mechanical and optical features are fully customisable.
- DALI dimmable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 15°, 25°, 40°, 60°.

ACCESSORIES AND OPTIONS

- Optional galvanic finishes (e.g. gold, nickel, burnishing).