
NANO BULLET - LINEAR THECA MODULE

Showcases and jewellery displays

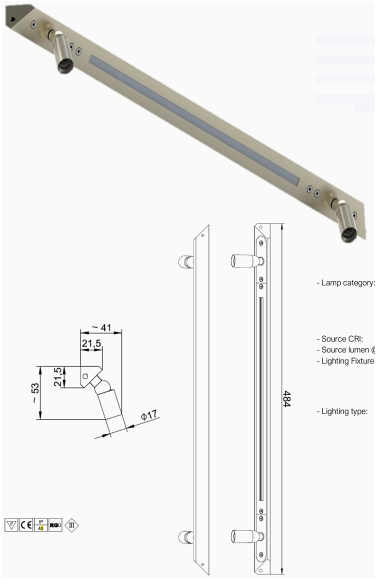

Fully customisable linear LED luminaire for installation in showcases, display cases, displays and furniture. Available in made-to-measure lengths. Beam with dot–line–dot effect, aluminium body, PMMA lens. Direct light. Dimmable.

SHOWCASE	IP 40 PROTECTION	CLASS III	10W POWER
3500K CCT	90 CRI	25° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Showcase
Power	10W
Colour temperature	3500K
Colour rendering (CRI)	90
Source flux	1500Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	Mid power
Distribution	Symmetric
Optics	Refractive/diffusing optics
Beam angle	2x25° / Lambertian

ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.35Kg
Finish	Made to measure
Material	Aluminium

NOTES

- All features are to be confirmed following prototype analysis.
- Dimmable on request with external remote driver.
- Driver to be ordered separately.
- Mechanical and optical features fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.