MINI BULLET

Showcases and jewellery displays

DATASHEET BEING UPDATED



LED luminaire for ceiling installation. Minimal thickness. Aluminium body. Direct light.

SHOWCASE	PROTECTION	POWER	CCT
	IP 20	2W	2700–4000K

CRI	BEAM
80–97	30°

GENERAL

Category	LED
Environment	Indoor
IP rating	IP20
Installation	Showcase
Power	2W
Colour temperature	2700K, 3000K, 3500K, 4000K
Colour rendering (CRI)	80 · 90 · 95 · 97
Luminaire flux	146lm

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Spot
Beam angle	30°


ELECTRICAL

Power supply	350mA

MECHANICAL

Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

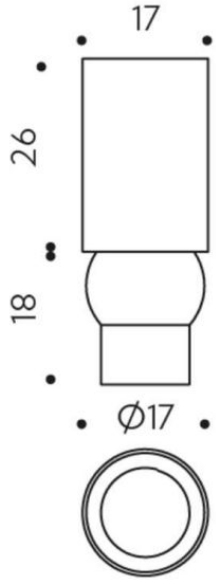

NOTES

– Dimmable with constant current driver not included.