THOR XS Q *Wall light, surface-mounted*



Fully customisable wall-mounted light with IP65 protection rating for outdoor installation. Direct and indirect light sources for uplight and downlight effect. Aluminium body, glass cover.

WALL	IP 65 PROTECTION	CLASS III	3W POWER
3000K CCT	90 CRI	10° BEAM	Remote DRIVER

CONTROL DALI

GENERAL

Category	Wall light, surface-mounted
Environment	Outdoor
IP rating	IP65
Installation	Wall-mounted with bracket
Power	3+3W
Colour temperature	3000K
Colour rendering (CRI)	90
Source flux	2×358lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct/indirect
LED source	LED Mid Power
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	10°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.400 Kg
Finish	Any RAL or NCS code
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

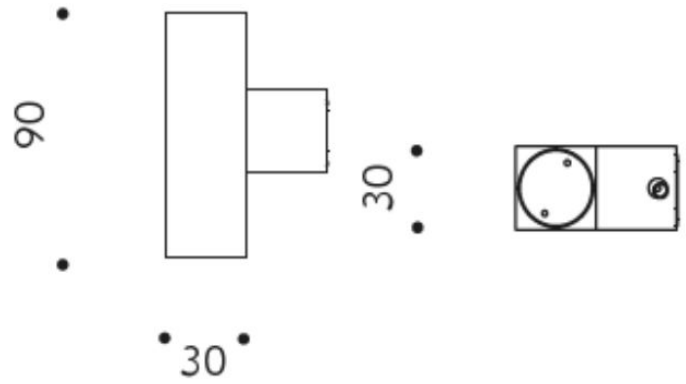

NOTES

- Driver to be ordered separately.
- DALI dimmable, with remote driver not included.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 10°, 20°, 35°, 60°.

ACCESSORIES AND OPTIONS

- Custom galvanic finishes.