APPLIQUE DOUBLE CANNON IP65 *Wall light*



Fully customisable luminaire with dual Cannon IP65: two powerful adjustable spotlights positioned on the sides of the structure. Suitable for outdoor wall installations.

WALL	IP 65 PROTECTION	CLASS II	12W + 12W POWER
3000K CCT	98 CRI	18–60° BEAM	Remote DRIVER

GENERAL

Category	Wall light
Environment	Outdoor
IP rating	IP65
Installation	Wall/ceiling
Power	12W + 12W
Colour temperature	3000K
Colour rendering (CRI)	98
Source flux	2908Lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Spot
Optics	Refractive optics
Beam angle	18°, 24°, 36°, 60°.


ELECTRICAL

Driver	Remote*
Power supply	24Vdc
Insulation class	II

MECHANICAL

Dimensions	See drawing
Finish	RAL to be defined
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

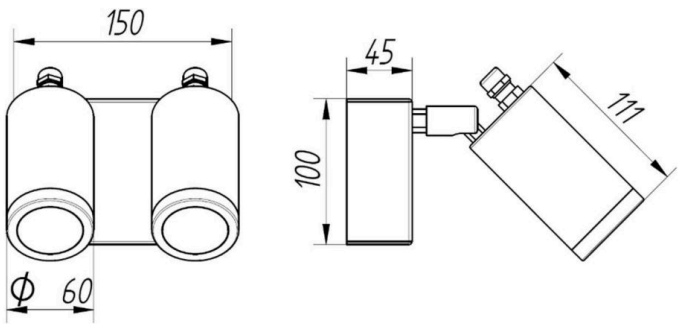

NOTES

- Mechanical and electrical features can be customised according to the customer's wishes.
- *Integrated driver housing

ACCESSORIES AND OPTIONS

- Honeycomb anti-glare filter