CAROLINA *Outdoor and wet locations*



Adjustable outdoor LED projector with IP65 protection rating, for general outdoor architectural lighting installations. Suitable for garden installations. Aluminium body. Glass lens. Paint finishes according to RAL or NCS codes.

GROUND	IP 65 PROTECTION	CLASS III	9W POWER
2700–4000K CCT	80–97 CRI	Remote DRIVER	

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	Ground-mounted
Power	9W
Colour temperature	2700K, 3000K, 3500K, 4000K
Colour rendering (CRI)	80 · 90 · 95 · 97
Luminaire flux	720lm

OPTICS

Emission	Direct
LED source	COB
Distribution	Symmetric
Optics	Refractive lens
Beam angle	24/38/60/Elliptical


ELECTRICAL

Driver	Remote
Power supply	500mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	150gr
Finish	Any RAL or NCS code
Material	Aluminium
Rotation	+/- 180°
Tilt	0/180°

TECHNICAL DRAWINGS AND DETAILS

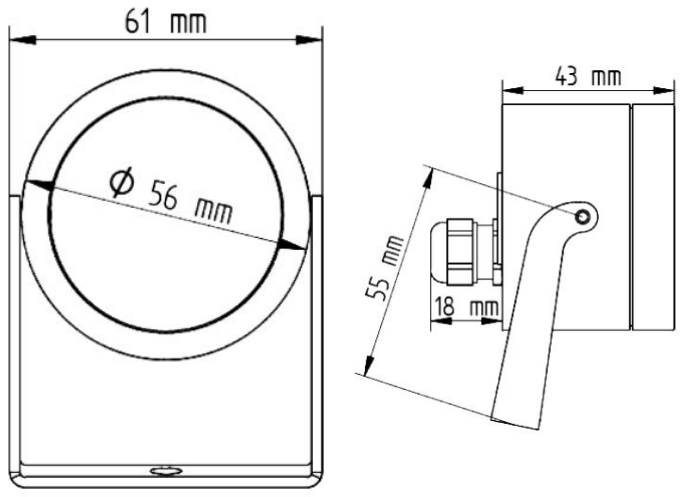

NOTES

- Dimmable with constant current driver not included

ACCESSORIES AND OPTIONS

- Barn doors
- Ground spike
- Galvanic finishes