
LOW VOLTAGE MINI TRACK *Track*

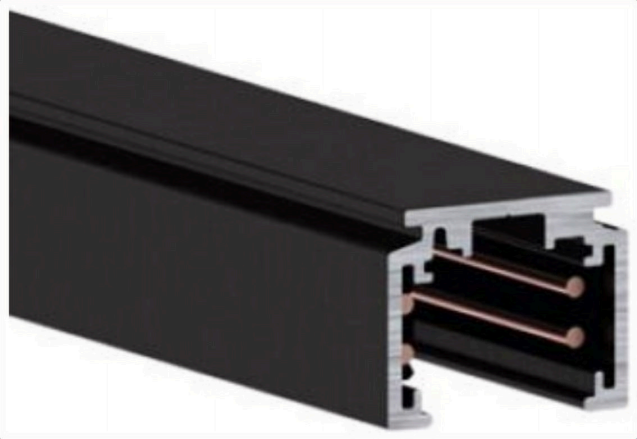

The Lucenova low-voltage mini track is a Class III - SELV product. Supply voltage must be between 0 and 60 Vdc and supply current must not exceed 15 A. Ambient temperature must be 25°C, while operating temperature must not exceed 70°C. The 4 track conductors can be used to create two separate power circuits, or one power circuit and one for the DATA BUS. The use of power supplies, drivers, DATA BUS systems and components not SELV-approved and/or with an output voltage above 60 Vdc is prohibited.

TRACK | IP 20 PROTECTION | CLASS III

GENERAL

IP rating	IP20

ELECTRICAL

Insulation class	III

MECHANICAL

Dimensions	1m, 2m, 3m, custom length
Weight	1.5 Kg/m

TECHNICAL DRAWINGS AND DETAILS

