
NOVASPIRIT 1413 ASYMMETRIC MAG *Linear luminaire*

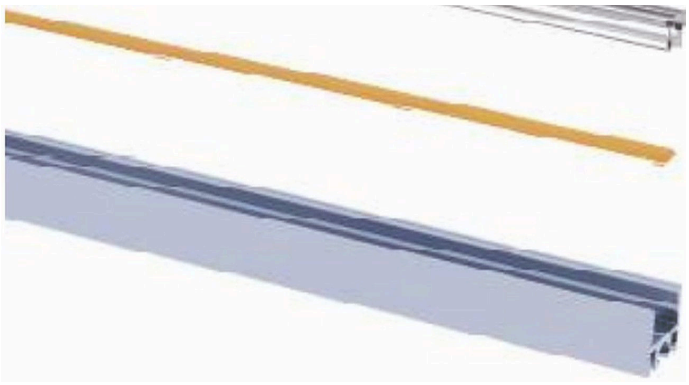

Extruded aluminium profile with plano-convex PMMA lens. Suitable for LED strips from 4.8W/m up to 24W/m, with 2835 or 5050 LED packages, including RGBWW. Suitable for installing IP20 or IP65 LED strips. Suitable for LED strips up to 10 mm wide.

LINEAR	IP 20	≤ 24W/m	RGBWW	25–50°
	PROTECTION	POWER	COLOUR	BEAM

GENERAL

Category	Linear luminaire
Environment	Indoor or outdoor
IP rating	IP20
Installation	Surface mounting with clips
Power	Up to 24W/m


OPTICS


Emission	Linear luminaire
LED source	3528, 5050, RGBWW
Distribution	Symmetric
Optics	Refractive
Beam angle	Asymmetric 25°-50°

MECHANICAL

Dimensions	See drawing
Finish	Aluminium
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

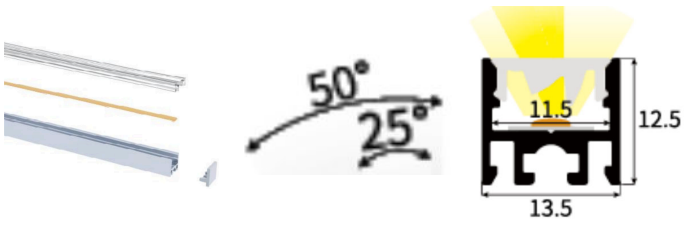

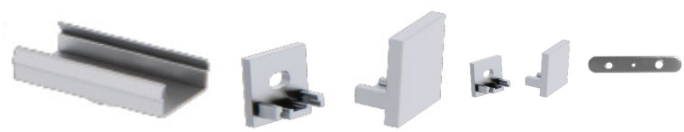

NOTES

- Fixing with metal clips.
- End cap.
- Metal connector.
- Metal fixing clip.