NIDOL INDY

Outdoor and wet locations



Small IP65 pole luminaire with high efficiency and a clean design, for lawns, small trees and shrubs. Also suitable for outdoor transit areas. Glare-free.

BOLLARD	IP 65	CLASS III	5W
	PROTECTION		POWER

2700K	>90	Remote
CCT	CRI	DRIVER

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	With pole
Power	5W
Colour temperature	2700K
Colour rendering (CRI)	>90
Source flux	260lm

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Symmetric
Optics	Diffusing PMMA
Beam angle	Lambertian


ELECTRICAL

Driver	Remote
Power supply	24 Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	290g
Finish	Corten or RAL and NCS codes
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

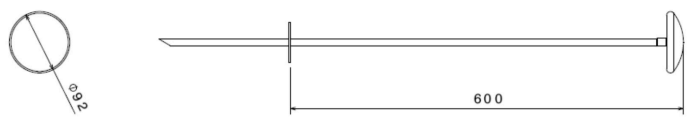

NOTES

- Remote driver to be selected according to the architectural design and the number of spotlights to be controlled.
- Fully customisable luminaire: all technical features can be modified on request according to the needs of the project manager or client.