
TUBO RGBW L=2M *Museum, RGB and stage*

LED tube for decorative lighting. RGBW.

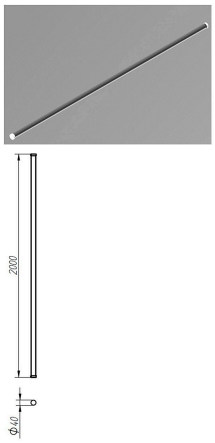

PROJECTOR	IP 65 PROTECTION	CLASS III	40W POWER
RGBW COLOUR	>90 CRI	360° BEAM	Remote DRIVER

CONTROL **Casambi**

GENERAL

Category	LED
Environment	Indoor
IP rating	IP65
Installation	Wall-mounted
Power	40W (al 100%)
Colour temperature	RGBW (3200K)
Colour rendering (CRI)	>90
Source flux	800 lm al 100%

OPTICS

Emission	Direct
LED source	Neonflex
Distribution	Symmetric
Optics	Opal diffuse
Beam angle	360°


ELECTRICAL

Driver	Remote
Power supply	24 Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	To be defined
Material	To be defined

TECHNICAL DRAWINGS AND DETAILS

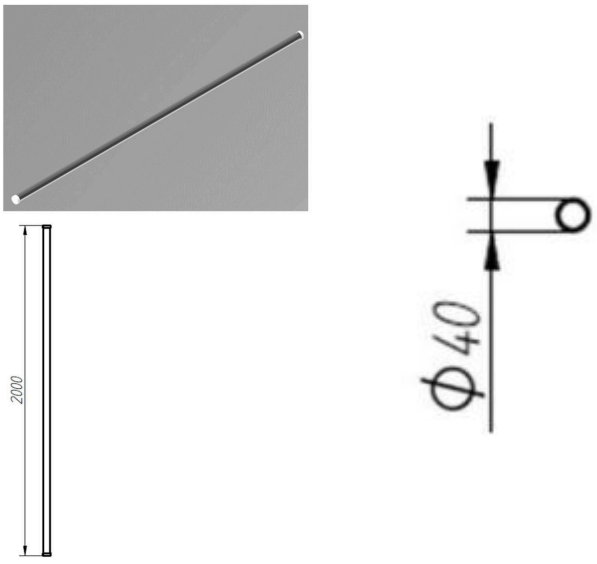

NOTES

– Dimmable with Casambi system, quoted separately.