DOUBLE CANNON EVO POLE (A) *Pole lamp*



Fully adjustable double LED projector, mounted on a bollard. Suitable for installation along outdoor walkways, gardens and green areas. Supplied with light shield for glare control. DALI dimmable: the DALI drivers are housed in the upper part of the bollard. Anthracite paint finish. For architectural reasons, the upper part of the bollard aesthetically echoes the projector's light shield.

BOLLARD	IP 65 PROTECTION	CLASS I	18W POWER
4000K CCT	90 CRI	60° BEAM	

CONTROL **DALI**

GENERAL

Category	Pole lamp
Environment	Outdoor
IP rating	IP65
Installation	Pole
Power	2×18W
Colour temperature	4000K
Colour rendering (CRI)	90
Source flux	2 × 2200lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive
Beam angle	60°


ELECTRICAL

Driver	36W
Power supply	220 Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	Approx. 20 kg
Finish	Anthracite
Material	Aluminium
Rotation	180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

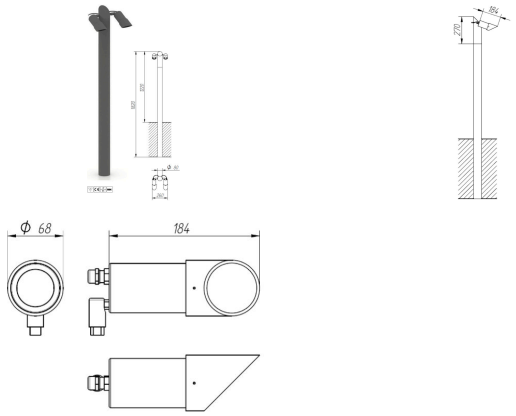

NOTES

- DRAFT: all features are to be confirmed.
- Also available with 15°, 25°, 35°, 60° optics.