
FLEX *Outdoor and wet locations*

Neonflex. High luminous efficacy LEDs.

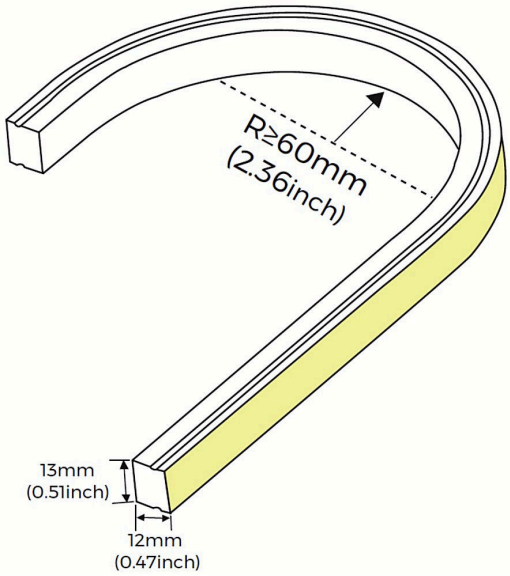

PROJECTOR	CLASS III	15W/m	2700K
		POWER	CCT
>90	120°	Remote	
CRI	BEAM	DRIVER	

GENERAL

Category	LED
Environment	Indoor/outdoor
Power	15W/m
Colour temperature	2700K
Colour rendering (CRI)	>90
Source flux	819 lm/m

OPTICS

Distribution	Uniform
Optics	Single optic
Beam angle	120°

ELECTRICAL

Driver	Remote
Power supply	24 Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	— · Note: 50mm
Material	Silica gel · clear PC

NOTES

– Dimmable with constant current driver not included.

ACCESSORIES AND OPTIONS

– Accessories: mounting clips