CANNON GU10 IP65 *Outdoor projector*



Adjustable outdoor LED projector for general outdoor architectural lighting installations. Aluminium body, GU10 LED source for easy maintenance. Paint finishes according to RAL or NCS codes.

PROJECTOR	IP 65 PROTECTION	CLASS I	8W POWER
3000K CCT	98 CRI	12–60° BEAM	Integrated DRIVER

GENERAL

Category	Outdoor projector
Environment	Outdoor
IP rating	IP65
Installation	Bracket-mounted projector
Power	8W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	650Lm

OPTICS

Emission	Direct
LED source	GU10
Distribution	Symmetric
Optics	Refractive optics
Beam angle	12°/35°/60°


ELECTRICAL

Driver	Integrated
Power supply	220Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	250gr
Finish	Any RAL and NCS code
Material	Aluminium, glass
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

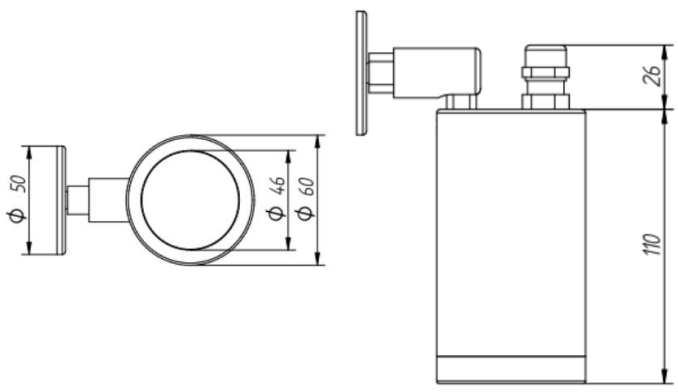

NOTES

- Mechanical and optical features are fully customisable.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.

ACCESSORIES AND OPTIONS

- Optional galvanic finishes (e.g. gold, nickel, burnishing).
- Optional: ground spike.