NOVASPOT M OV ADJ FL *Recessed downlight*



Adjustable trimless recessed LED luminaire with metal recessed housing for false ceiling installation. Aluminium body, PMMA lens, direct light.

RECESSED	IP 20 PROTECTION	CLASS III	12W POWER
2700K CCT	90 CRI	24° BEAM	Remote DRIVER

CONTROL DALI

GENERAL

Category	Recessed downlight
Environment	Indoor
IP rating	IP20
Installation	Recessed in false ceiling
Power	12W
Colour temperature	2700K
Colour rendering (CRI)	90
Luminaire flux	804Lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	24°


ELECTRICAL

Driver	Remote
Power supply	700 mA
Insulation class	III
Control	ON/OFF o DALI

MECHANICAL

Dimensions	See drawing
Recess cut-out	Diam. 86mm
Weight	250gr
Finish	White / anodised
Material	Aluminium
Rotation	360°
Tilt	+/-25°

TECHNICAL DRAWINGS AND DETAILS

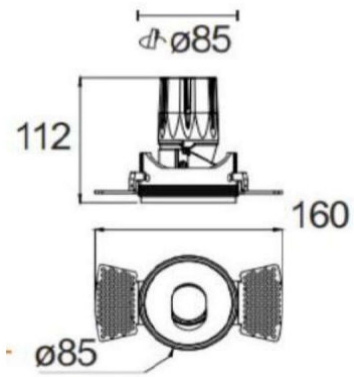

NOTES

- ON/OFF or DALI dimmable with external remote constant current driver.
- Driver to be ordered separately.