SMART CANNON - XLP *Track projector*



Tiltable LED projector on Eurostandard track for general lighting. Aluminium body, PC reflector. Paint finish according to RAL or NCS codes. Very high R9 value, for naturally saturated red colour rendering.

TRACK	IP 20 PROTECTION	CLASS II	30W POWER
3000K CCT	95 CRI	15–60° BEAM	Integrated DRIVER

GENERAL

Category	Track projector
Environment	Indoor
IP rating	IP20
Installation	Electrified Euro track
Power	30W
Colour temperature	3000K
Colour rendering (CRI)	95
R9	97
Source flux	3150Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Reflective optics
Beam angle	15°, 30°, 60°


ELECTRICAL

Driver	On board
Power supply	220 VAC
Insulation class	II

MECHANICAL

Dimensions	See drawing
Weight	350gr
Finish	RAL9005
Material	Aluminium
Rotation	359°
Tilt	0/90°

TECHNICAL DRAWINGS AND DETAILS

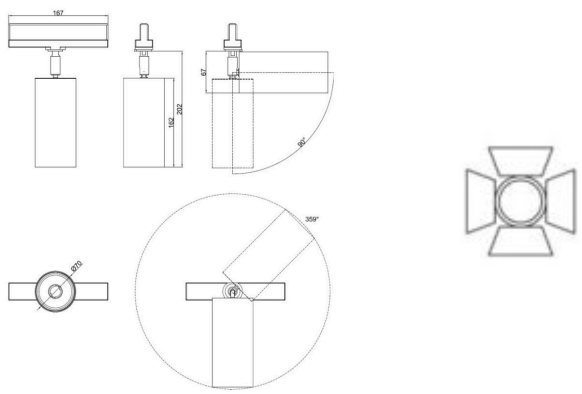

NOTES

- Mechanical and optical features are fully customisable.
- Finishes (e.g. gold, nickel, burnishing).
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.

ACCESSORIES AND OPTIONS

- Optional: barn doors.