NOVA NOVA L IP54 *Recessed downlight*



Adjustable LED luminaire for recessed installation in false ceilings with steel springs. Aluminium body, PMMA lens, direct light. Suitable for installations in damp environments with IP54 protection rating. Very high R9 value for naturally saturated red colour rendering.

RECESSED	IP 54	CLASS III	18W
PROTECTION			POWER
3000K	**95**	**15°**	**Remote**
CCT	CRI	BEAM	DRIVER

GENERAL

Category	Recessed downlight
Environment	Indoor / outdoor, IP54 compliant
IP rating	IP54
Installation	Recessed in false ceiling
Power	18W
Colour temperature	3000K
Colour rendering (CRI)	95
R9	97
Source flux	1872lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	15°


ELECTRICAL

Driver	Remote
Power supply	500 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.35Kg
Finish	Anodised
Rotation	360°
Tilt	+/-25°

TECHNICAL DRAWINGS AND DETAILS

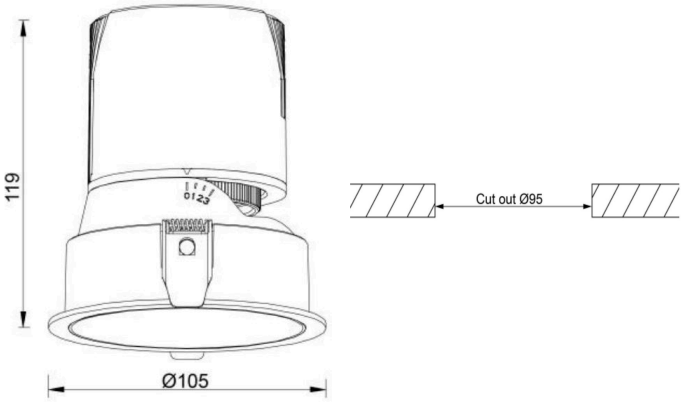

NOTES

- Dimmable with remote external constant current driver.
- Driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 15°, 35°, 60°.