NONE M+ TRACK *Track*



Fully adjustable LED luminaire for track installation. Direct light. Gloss black painted collar for an anti-glare effect. Aluminium body, PMMA lens. RAL 9016 finish + 100% gloss RAL 9005.

TRACK	CLASS III	18W	3500K
		POWER	CCT
95	**60°**	**Remote**	
CRI	BEAM	DRIVER	

GENERAL

Category	**LED**
Environment	**Indoor**
Installation	**Track**
Power	**18W**
Colour temperature	**3500K**
Colour rendering (CRI)	**95**
R9	**97**
Source flux	**2020lm**

OPTICS

Emission	**Direct**
LED source	**LED COB**
Distribution	**Spot**
Optics	**Refractive optics**
Beam angle	**18/24/38/60°**


ELECTRICAL

Driver	**Remote**
Power supply	**48Vdc**
Insulation class	**III**

MECHANICAL

Dimensions	**See drawing**
Finish	**RAL 9016 + 100% gloss RAL 9005**
Material	**Aluminium**
Rotation	**360°**
Tilt	**90°**

TECHNICAL DRAWINGS AND DETAILS

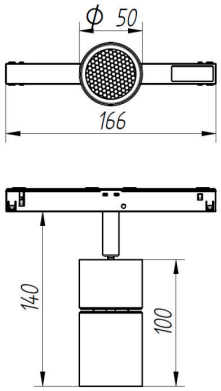

ACCESSORIES AND OPTIONS

– Honeycomb anti-glare filter.