# NOVA NOVA M FL Q IP54 *Recessed downlight*



Adjustable trimless LED luminaire, recessed in false ceilings with metal recessed housing. Aluminium body, PMMA lens, direct light. Suitable for installations in damp environments, with IP54 protection rating. Very high R9 index for naturally saturated red rendering.

| RECESSED | IP 54 PROTECTION | CLASS III | 10W POWER |
|---|---|---|---|
| 3000K CCT | 98 CRI | 15° BEAM | Remote DRIVER |

## GENERAL

| | |
|---|---|
| Category | Recessed downlight |
| Environment | Indoor / outdoor, IP54 compliant |
| IP rating | IP54 |
| Installation | Recessed in false ceiling |
| Power | 10W |
| Colour temperature | 3000K |
| Colour rendering (CRI) | 98 |
| R9 | 97 |
| Source flux | 1055lm |
| Luminaire flux | See photometric data |

## OPTICS

| | |
|---|---|
| Emission | Direct |
| LED source | COB LED |
| Distribution | Symmetric |
| Optics | PMMA lens, refractor |
| Beam angle | 15° |


## ELECTRICAL

| | |
|---|---|
| Driver | Remote |
| Power supply | 600 mA |
| Insulation class | III |

## MECHANICAL

| | |
|---|---|
| Dimensions | See drawing |
| Recess cut-out | Diam. 95mm |
| Weight | 250gr |
| Finish | Anodised |
| Material | Aluminium |
| Rotation | 360° |
| Tilt | +/-25° |

TECHNICAL DRAWINGS AND DETAILS

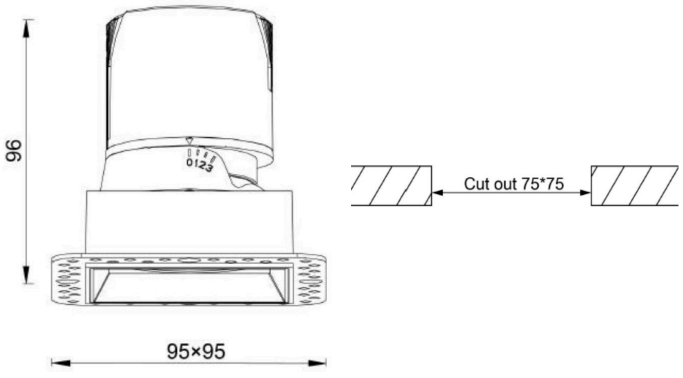


NOTES

- Dimmable with external remote constant current driver.
- Driver to be ordered separately.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 35°, 60°.