
TORRETTA GIOIELLI OTTONE

Recessed linear

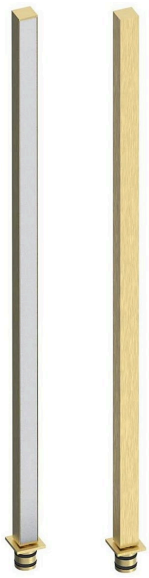

Fully customisable linear LED luminaire for recessed installation in showcases, displays and furniture. Dot–line–dot beam, brushed brass body, opal PMMA diffuser included. Dimmable.

SHOWCASE	PROTECTION	CLASS III	POWER
	IP 40		9W

CCT	CRI	BEAM	DRIVER
4000K	90	70°	Remote

GENERAL

Category	Recessed linear
Environment	Indoor
IP rating	IP40
Installation	Pin on the base
Power	9W
Colour temperature	4000K
Colour rendering (CRI)	90
Source flux	1670Lm/m
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED array
Distribution	Lambertian
Optics	Diffuse
Beam angle	70°

ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing
Weight	0.6Kg/m
Finish	Natural anodised
Material	Brushed brass, PMMA
Rotation	360°

TECHNICAL DRAWINGS AND DETAILS



NOTES

- All features are to be confirmed through prototype analysis.
- Dimmable on request with remote external driver.
- Driver to be ordered separately.
- The luminaire must be powered on each individual element.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.