
NP.EL.ILL.T17 – GROUND INDY

Outdoor and wet locations

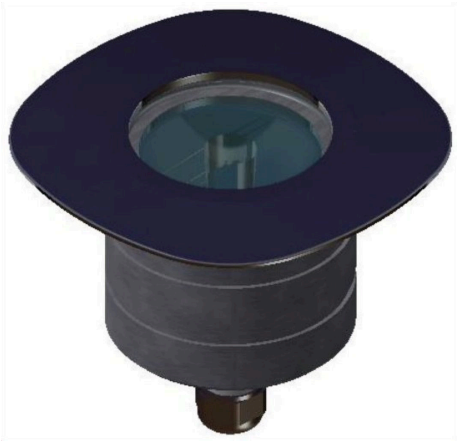

Walk-over in-ground recessed luminaire for outdoor use. Stainless steel flange, aluminium body, tempered glass.

BOLLARD	IP 65 PROTECTION	CLASS III	8W POWER
2700K CCT	>80 CRI	15° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	With pole and base plate
Power	8W
Colour temperature	2700K
Colour rendering (CRI)	>80
Luminaire flux	580Lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive PMMA
Beam angle	15°


ELECTRICAL

Driver	Remote
Power supply	24 Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø 60mm
Weight	350gr
Finish	Anthracite
Material	Stainless steel · aluminium

TECHNICAL DRAWINGS AND DETAILS

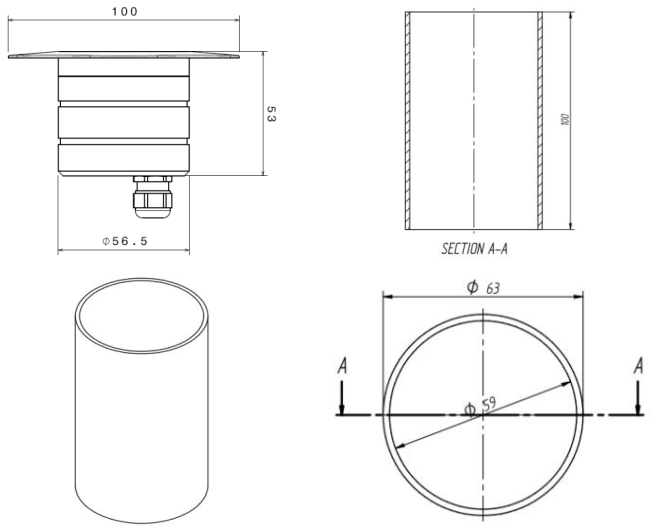

NOTES

- Remote driver to be selected according to the architectural design and the number of spotlights to be controlled.
- Fully customisable luminaire: all technical features can be modified on request according to the needs of the project manager or client.
- BOZZA. All features must be confirmed.

ACCESSORIES AND OPTIONS

- Recessed housing available, to be ordered separately – see details in the drawing.