NABOO NAVY ADJ *Downlight, step light*



Tiltable, fully customisable IP40 luminaire for panel installation using a recessed housing with adjustable brackets to fit the panel thickness. Also available with recessed housing for trimless installation in false ceilings. Also available with springs for installation on concrete ceilings. Suitable for downlight or step light use.

RECESSED	IP 40 PROTECTION	CLASS III	2W POWER
3000K CCT	90 CRI	25–60° BEAM	Remote DRIVER

GENERAL

Category	Downlight, step light
Environment	Indoor
IP rating	IP40
Installation	On panel with recessed housing
Power	2W
Colour temperature	3000K
Colour rendering (CRI)	90
Source flux	190Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	Nichia
Distribution	Symmetric
Optics	Refractive optics
Beam angle	25°, 40°, 60°, diffuse


ELECTRICAL

Driver	Remote
Power supply	700mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	50gr
Finish	Any RAL and NCS code
Material	Aluminium
Rotation	+/- 180°
Tilt	+/- 25°

TECHNICAL DRAWINGS AND DETAILS

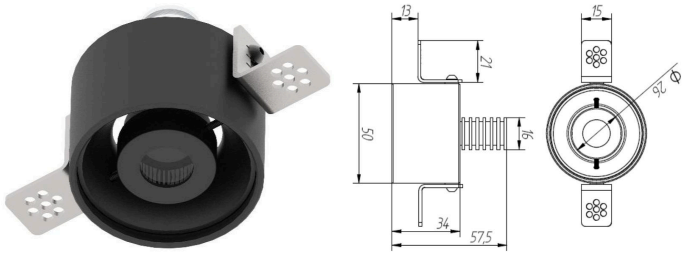

NOTES

- All features are to be confirmed following analysis of prototypes or samples.
- Dimmable on request with external remote driver.
- Driver to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2500K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K.
- Painted in any RAL or NCS code at no extra charge.
- Galvanic finishes available at an extra charge, to be quoted.