NOVASPOT MSP IP65 *Recessed downlight*

Fixed recessed spotlight with IP65 protection rating, for false ceiling installation with springs. Aluminium body. Suitable for damp environments.



RECESSED	IP 65 PROTECTION	CLASS III	12W POWER
3000K CCT	97 CRI	38° BEAM	Remote DRIVER

CONTROL · ON REQUEST DALI Casambi

GENERAL

Category	Recessed downlight
Environment	Outdoor
IP rating	IP65
Installation	In false ceiling with springs
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	Up to 97
Source flux	1796Lm

OPTICS

Emission	Direct
LED source	COB
Distribution	Symmetric
Optics	PMMA lens
Beam angle	38°


ELECTRICAL

Driver	Remote
Power supply	700mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø68mm
Weight	350gr
Finish	Any RAL and NCS code
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

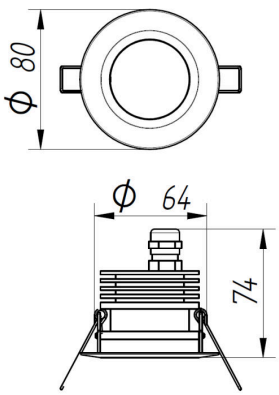

NOTES

- DALI or Casambi dimmable on request.
- Available optics: 15°, 24°, 38°, 60°.
- Available CCTs: 2700K, 3000K, 3500K, 4000K, 5000K.