GRU M+ TRACK *Track*



Fully adjustable LED luminaire for track installation. Direct light. Gloss black painted collar for an anti-glare effect. Aluminium body, PMMA lens. RAL 9016 finish + 100% gloss RAL 9005.

TRACK	IP 40 PROTECTION	CLASS III	16W POWER
3500K CCT	95 CRI	60° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Track
Power	16W
Colour temperature	3500K
Colour rendering (CRI)	95
R9	97
Source flux	1795lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Spot
Optics	Refractive optics
Beam angle	18/24/38/60°


ELECTRICAL

Driver	Remote
Power supply	48Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Finish	RAL 9016 + 100% gloss RAL 9005
Material	Aluminium
Rotation	360°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

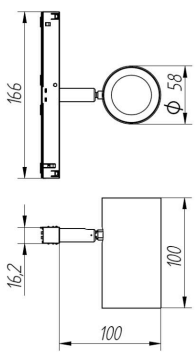

NOTES

– Fully customisable luminaire.