GROUND SHIELD *Uplight*

DATASHEET BEING UPDATED



IP65 single-beam LED emission; aluminium alloy or stainless steel ring; polyethylene recessed housing included. Thanks to the black painted metal light shield, the uplight avoids any glare, offering a wall washer effect with a well-defined light projection while reducing light pollution.

RECESSED	IP 65 PROTECTION	CLASS III	8W POWER
2700K CCT	98 CRI	60° BEAM	Remote DRIVER

GENERAL

Category	Uplight
Environment	Outdoor
IP rating	IP65
Installation	Recessed
Power	8W
Colour temperature	2700K
Colour rendering (CRI)	98
Source flux	787lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Asymmetric
Optics	Refractive
Beam angle	Half 60°


ELECTRICAL

Driver	Remote
Power supply	400mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø62mm
Weight	0.25Kg
Finish	Stainless steel
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

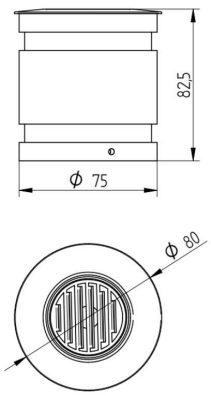

NOTES

– Dimmable with constant current driver to be ordered separately.