LINDA LAB *Technical linear lights*



Linear LED luminaire installable in continuous rows, designed for lighting commercial and industrial areas, combining efficiency and reliability. Modular design. The LED modules are available in a version with a 90° diffused beam angle, for uniform lighting of large surfaces, and in a version with batwing optics, suitable for lighting vertical surfaces. Integrated driver. Available for suspended or surface installation.

LINEAR	IP 40 PROTECTION	CLASS I	46W POWER
4000K CCT	>80 CRI	90° BEAM	Integrated DRIVER

CONTROL · ON REQUEST **DALI**

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Suspension/ceiling
Power	46W
Colour temperature	4000K
Colour rendering (CRI)	>80
Luminaire flux	8177lm

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Linear lens
Beam angle	90°


ELECTRICAL

Driver	On board
Power supply	220 Vac
Insulation class	I

MECHANICAL

Dimensions	B70xH80xL1740mm
Weight	6Kg
Finish	White
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

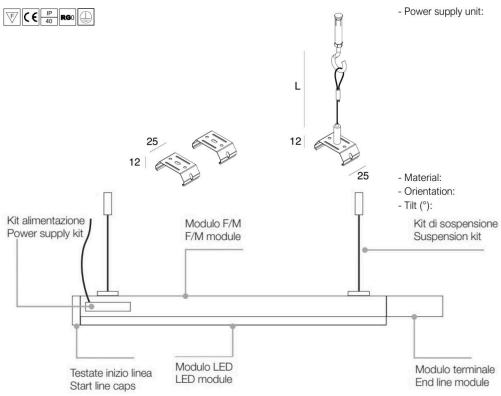

NOTES

- ON/OFF or DALI dimmable on request.
- Fixing with loop cable or ceiling clip on request.