QBO M TRACK MIRROR *Track projector*



Fully customisable and adjustable LED luminaire for installation on low-voltage micro track. Aluminium body, PMMA lens. Direct light. Mirror-finish surfaces. Custom paint finish available according to RAL and NCS codes. Very high R9 value for naturally saturated red colour rendering.

TRACK	IP 40 PROTECTION	CLASS III	12W POWER
3000K CCT	98 CRI	18° BEAM	Remote DRIVER

CONTROL · ON REQUEST **DALI**

GENERAL

Category	Track projector
Environment	Indoor
IP rating	IP40
Installation	On micro track
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1266Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive optics
Beam angle	18°


ELECTRICAL

Driver	Remote
Power supply	24Vdc / 48Vdc
Insulation class	III

MECHANICAL

Weight	200gr
Finish	Mirror finish
Material	Aluminium / steel / PMMA
Rotation	+/- 180°
Tilt	0/90°

TECHNICAL DRAWINGS AND DETAILS

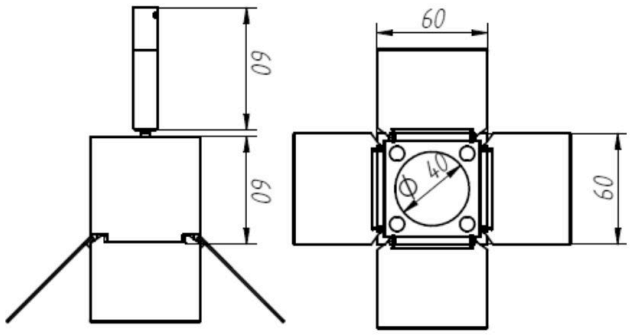

NOTES

- Mechanical and optical features are fully customisable.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 18°, 24°, 38°, 60°.
- DALI dimmable on request.

ACCESSORIES AND OPTIONS

- Optional: gloss black painted inner collar for anti-glare effect.
- Optional galvanic finishes (e.g. gold, nickel, burnishing).