
DEVOR FLEX

Wall washer, downlight, uplight

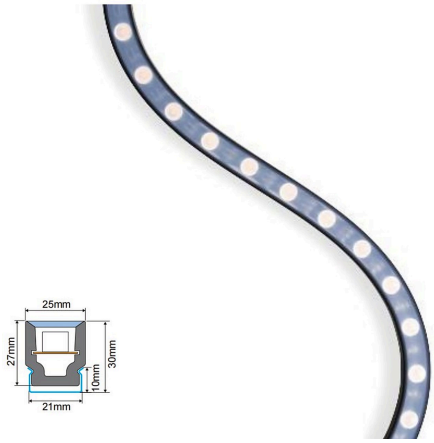

Flexible linear luminaire with IP65 protection rating. In-Out cables to simplify installation. Custom shrouds are available to control glare and guide the light beam. Suitable for outdoor areas or for lighting walls in damp environments. To optimise lighting effects, custom adjustable brackets are available for adjusting the luminaire.

LINEAR	IP 65 PROTECTION	CLASS III	24W/m POWER
2700K CCT	90 CRI	25° BEAM	Remote DRIVER

CONTROL DALI

GENERAL

Category	Wall washer, downlight, uplight
Environment	Outdoor
IP rating	IP65
Installation	With wall or ceiling bracket
Power	24W/m
Colour temperature	2700K
Colour rendering (CRI)	90
R9	57
Luminaire flux	1732Lm

OPTICS

Emission	Direct
LED source	LED High Power
Distribution	Wall washer
Optics	Refractive optics
Beam angle	25°

ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III
Control	DALI dimmable on request

MECHANICAL

Dimensions	(L x H x P): 1000 × 50 × 100mm
Weight	2kg/m
Finish	Black
Material	Polymer materials
Tilt	0-90° with custom brackets

TECHNICAL DRAWINGS AND DETAILS

