
AEROTUBE *Pendants and decorative lights*

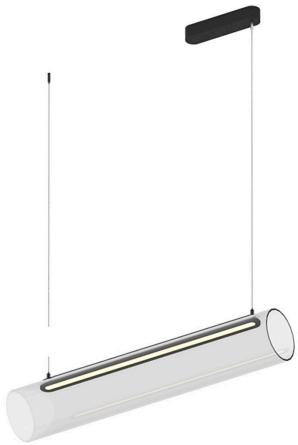

LED pendant luminaire with glass tube. Dot-free light. Aluminium profile with diffusing screen and suspension kit.

PENDANT	IP 40 PROTECTION	CLASS I	30W POWER
3000K CCT	>94 CRI	180° BEAM	Integrated DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	Suspension
Power	30W
Colour temperature	3000K
Colour rendering (CRI)	>94
Source flux	4200lm

OPTICS

Emission	Direct
LED source	LED strip
Distribution	Symmetric
Optics	Microprismatic opal
Beam angle	180°


ELECTRICAL

Driver	On board
Power supply	230 Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Finish	To be defined
Material	Aluminium + clear diffuser

TECHNICAL DRAWINGS AND DETAILS

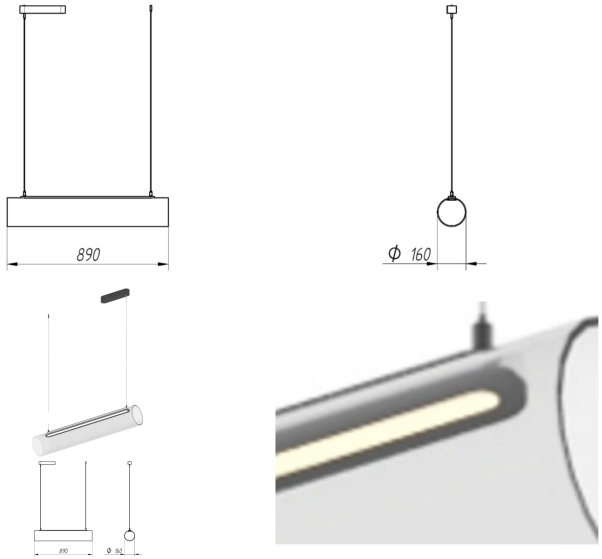

NOTES

- ON/OFF.
- DRAFT: all features are to be confirmed.