NL.IP4 GROUND PICO CARTONGESSO

Outdoor and wet locations

DATASHEET BEING UPDATED



IP65 LED step light. Anodised aluminium body. Fully resin-encapsulated LED module, opal PMMA diffuser.

RECESSED	IP 65 PROTECTION	CLASS III	3W POWER
4000K CCT	90 CRI	15° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	Recessed
Power	3W
Colour temperature	4000K
Colour rendering (CRI)	90
Source flux	258lm

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Acrylic refractive optics
Beam angle	15°


ELECTRICAL

Driver	Remote
Power supply	700 mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø40
Weight	190g
Finish	Aluminium
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

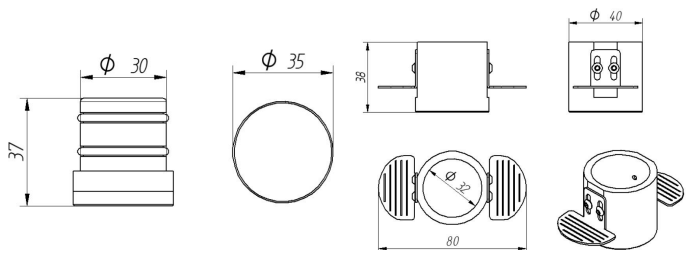

NOTES

– Remote driver to be selected according to the architectural design and the number of spotlights to be controlled.