
IXBS - APPLIQUE SQUARE MONOEMISSIONE *Wall light*

Wall or ceiling luminaires: their small size and sharp edges make them design objects as well as light sources.

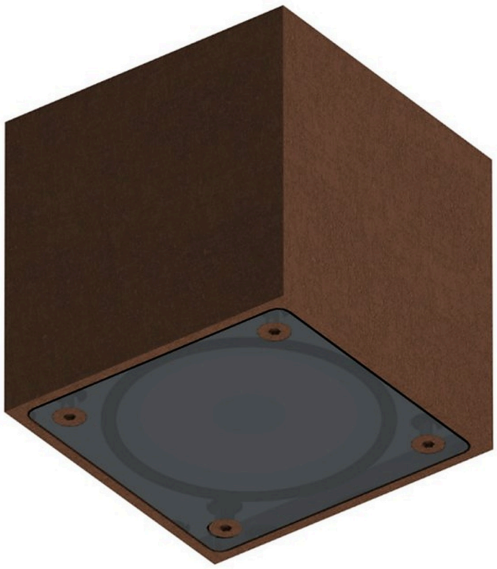

WALL	IP 20 PROTECTION	CLASS III	4W POWER
3000K CCT	>90 CRI	26–60° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Indoor
IP rating	IP20
Installation	Wall/ceiling
Power	4W
Colour temperature	3000K
Colour rendering (CRI)	>90
Source flux	360lm

OPTICS

LED source	COB
Beam angle	26°/38°/60°


ELECTRICAL

Driver	Remote 24 Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Finish	RAL Corten
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

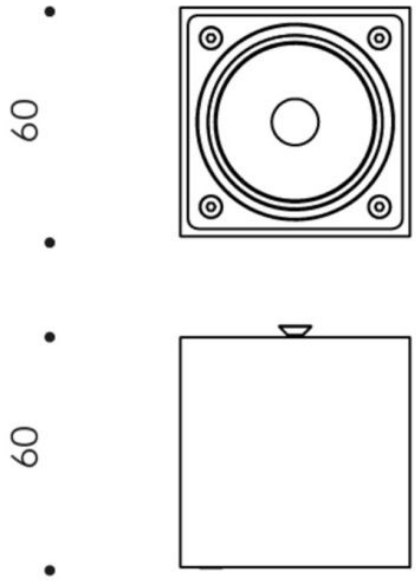

NOTES

– Dimmable with constant current driver not included.