
HERO S FL *Recessed downlight*

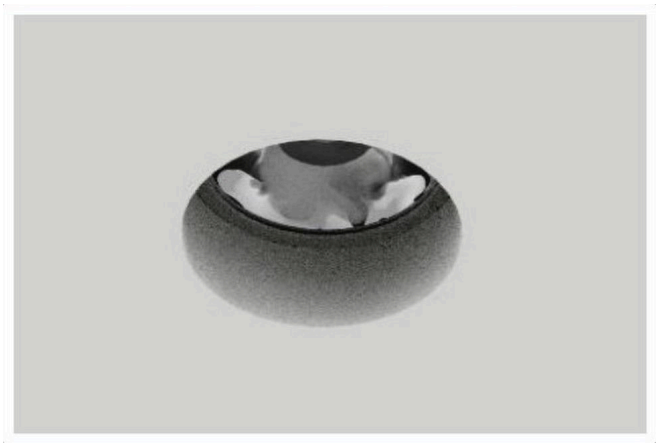

LED luminaire recessed in false ceilings with recessed housing. Trimless. Aluminium body. Very high R9 value, for naturally saturated red colour rendering.

RECESSED	IP 40 PROTECTION	CLASS III	8W POWER
3000K CCT	98 CRI	15–60° BEAM	Remote DRIVER

GENERAL

Category	Recessed downlight
Environment	Indoor
IP rating	IP40
Installation	Ceiling recessed
Power	8W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	875lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive
Beam angle	15°, 25°, 35, 60°

ELECTRICAL

Driver	Remote
Power supply	500mA
Insulation class	III

MECHANICAL

Recess cut-out	Ø62mm
Weight	65gr
Finish	All RAL and NCS codes
Material	Aluminium

NOTES

- Fully customisable luminaire.
- Available in a constant voltage version.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 25°, 38°, 60°.

ACCESSORIES AND OPTIONS

- Optional: honeycomb anti-glare filter.

TECHNICAL DRAWINGS AND DETAILS

