# LINEAR DOT TRACK 108 *Track projector*

Linear LED luminaire with light points for track installation. Not adjustable. Combined optical system with 6 selectable angles, suitable for different scenarios. Aluminium body. On-board driver.



| TRACK | IP 20 PROTECTION | CLASS II | 65W POWER |
|---|---|---|---|
| 4000K CCT | >90 CRI | 60–90° BEAM | Integrated DRIVER |

CONTROL DALI

### GENERAL

| | |
|---|---|
| Category | Track projector |
| Environment | Indoor |
| IP rating | IP20 |
| Installation | Electrified track |
| Power | 65W |
| Colour temperature | 4000K |
| Colour rendering (CRI) | >90 |
| Source flux | 7150Lm |

### OPTICS

| | |
|---|---|
| Emission | Direct |
| LED source | LED COB |
| Distribution | Symmetric |
| Optics | Reflector |
| Beam angle | 60°, 80°, 90° |


### ELECTRICAL

| | |
|---|---|
| Driver | On board |
| Power supply | 220-240VAC 50/60Hz |
| Insulation class | II |

### MECHANICAL

| | |
|---|---|
| Dimensions | See drawing |
| Weight | 1.100Kg |
| Finish | Black |
| Material | Aluminium |

TECHNICAL DRAWINGS AND DETAILS

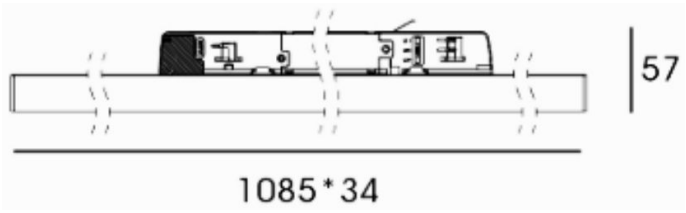


NOTES

- On/Off with integrated driver.
- DALI on request.
- Available in the following colour temperatures: 3000K, 4000K, 5000K.