
QBO M PLA FIX *Fixed downlight*

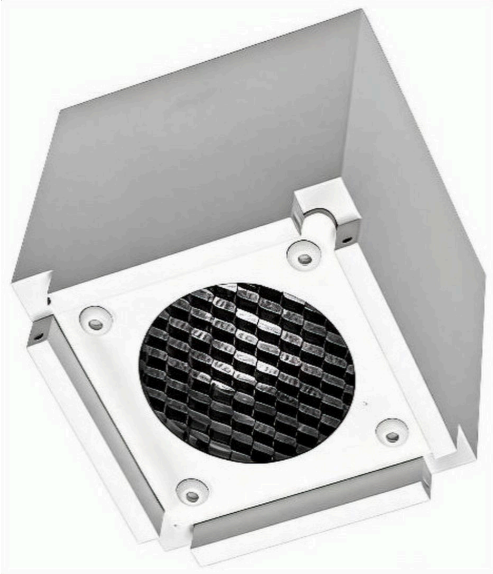

Fully customisable and adjustable LED luminaire for surface installation. Aluminium body, PMMA lens. Direct light. Custom paint finish available according to RAL and NCS codes. Very high R9 value for naturally saturated red colour rendering.

SURFACE	IP 40 PROTECTION	CLASS III	10W POWER
3000K CCT	98 CRI	18° BEAM	Remote DRIVER

CONTROL · ON REQUEST **DALI**

GENERAL

Category	Fixed downlight
Environment	Indoor
IP rating	IP40
Installation	Ceiling or wall-mounted
Power	10W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1055Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Refractive optics
Beam angle	18°


ELECTRICAL

Driver	Remote
Power supply	24Vdc / 48Vdc
Insulation class	III

MECHANICAL

Weight	200gr
Finish	Any RAL or NCS code
Material	Aluminium / PMMA

TECHNICAL DRAWINGS AND DETAILS

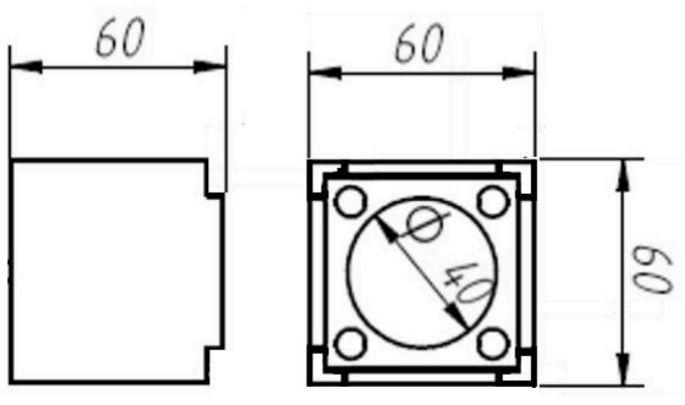

NOTES

- Mechanical and optical features are fully customisable.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following light beams: 18°, 24°, 38°, 60°.
- DALI dimmable on request.
- Driver to be ordered separately.

ACCESSORIES AND OPTIONS

- Optional: honeycomb anti-glare filter.
- Optional galvanic finishes (e.g. chrome, gold, nickel...).