GROUND NANO *Outdoor and wet locations*



Small size, high efficiency and clean design. Provides a uniform wall washer effect with a well-defined light projection even from the ground. Recessed light source to minimise glare. IP65 protection rating.

RECESSED	IP 65 PROTECTION	CLASS III	2W POWER
2700K CCT	80 CRI	40° BEAM	Remote DRIVER

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	Recessed
Power	2W
Colour temperature	2700K
Colour rendering (CRI)	80
Source flux	193lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Wide
Beam angle	40°


ELECTRICAL

Driver	Remote
Power supply	500mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø32
Weight	35gr
Finish	Natural anodised · mirror polished
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

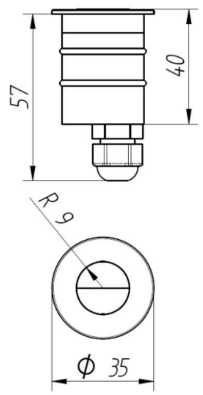

NOTES

– Remote driver to be selected according to the architectural design and the number of spotlights to be controlled.