NANO GLASS R *Fixed mini downlight*



Very small recessed spotlight. Material: natural brass. Flange with matt black finish to minimise the outer halo on the lit surface. Suitable for installation in furniture or showcases. Recessed light source for an anti-glare experience.

SHOWCASE	CLASS III	1,5W	2700K
POWER	CCT		

90	30–50°	Remote
CRI	BEAM	DRIVER

GENERAL

Category	Fixed mini downlight
Environment	Indoor
Installation	Ceiling, showcase, shelves
Power	1.5W
Colour temperature	2700K
Colour rendering (CRI)	90
Source flux	170 lm

OPTICS

Emission	Direct
LED source	LED Mid Power
Distribution	Symmetric
Optics	Refractive
Beam angle	30° (SM30), 50° (SM50)


ELECTRICAL

Driver	Remote
Power supply	350mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø12.5-13mm (to be confirmed)
Finish	Exterior: natural brass – Interior: matt RAL 9005
Material	Brass

TECHNICAL DRAWINGS AND DETAILS

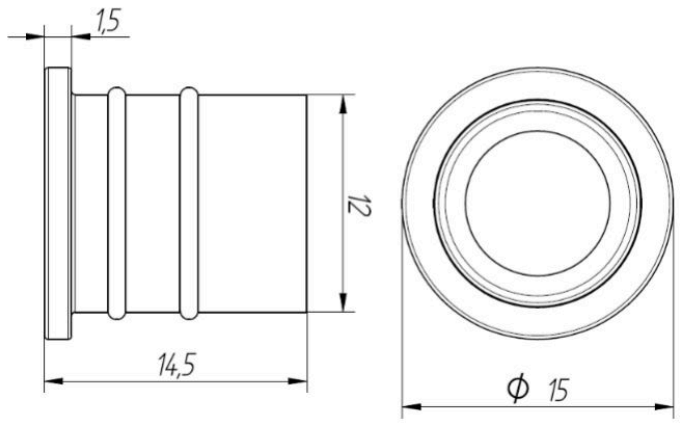

NOTES

- Remote driver to be selected according to the architectural design and the number of spotlights to be controlled.