ZED 220VAC IP65 *Outdoor and wet locations*



Fully customisable and adjustable LED luminaire for outdoor wall or pole installation, at 220Vac. IP65 protection rating: suitable for damp areas. Integrated on-board driver. Aluminium body, PMMA lens. Direct light. Paint finishes according to RAL or NCS codes. TRIAC dimmable.

PROJECTOR	PROTECTION	CLASS I	POWER
	IP 65		4W

CCT	CRI	BEAM	DRIVER
4000K	98	25°	Integrated

CONTROL Triac

GENERAL

Category	LED
Environment	Outdoor
IP rating	IP65
Installation	Surface-mounted
Power	4W
Colour temperature	4000K
Colour rendering (CRI)	98
Source flux	390lm

OPTICS

Emission	Direct
LED source	LED array
Distribution	Symmetric
Optics	Acrylic refractive optics
Beam angle	25°


ELECTRICAL

Driver	Integrated
Power supply	500 mA
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	400g
Finish	RAL 7035
Material	Aluminium
Rotation	359°
Tilt	10/90°

TECHNICAL DRAWINGS AND DETAILS

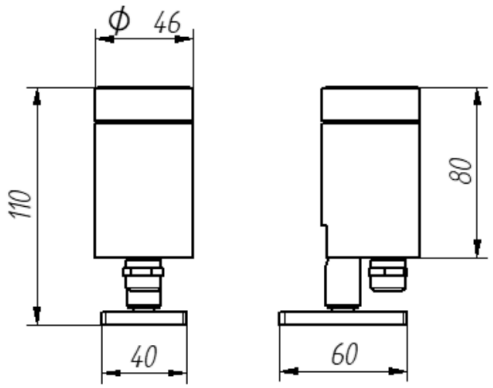

NOTES

– TRIAC dimmable.