IPENTA *Showcase*



Fully customisable linear LED luminaire for recessed installation in showcases, displays and furniture. Dot beam, aluminium body, opal PMMA diffuser included. Dimmable.

SHOWCASE	IP 40 PROTECTION	CLASS III	7W POWER
4000K CCT	>90 CRI	12–40° BEAM	Remote DRIVER

GENERAL

Category	Showcase
Environment	Indoor
IP rating	IP40
Installation	On shelves
Power	7W
Colour temperature	4000K
Colour rendering (CRI)	>90
Source flux	680 lm
Luminaire flux	See photometric data

OPTICS

LED source	LED Mid Power
Distribution	Linear / symmetric
Optics	Refractive
Beam angle	12°, 25°, 40°


ELECTRICAL

Driver	Remote
Power supply	350mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	See drawing

TECHNICAL DRAWINGS AND DETAILS

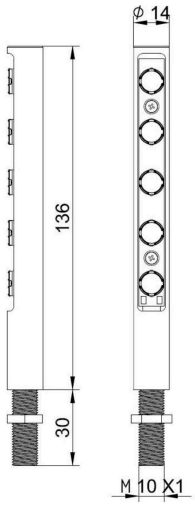

NOTES

- All features are to be confirmed through prototype analysis.
- Dimmable on request with remote external driver.
- Driver to be ordered separately.
- The luminaire must be powered on each individual element.
- Mechanical and optical features are fully customisable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K.