AGAMAR XS TRACK *Track projector*



Adjustable, fully customisable LED luminaire for installation on low-voltage track. Gloss black painted collar for an anti-glare effect. Aluminium body, PMMA lens, direct light. Paint finish according to RAL and NCS codes. Very high R9 value, for naturally saturated red colour rendering.

TRACK	IP 40 PROTECTION	CLASS III	4,5W POWER
3000K CCT	98 CRI	25° BEAM	Remote DRIVER

CONTROL · ON REQUEST DALI Casambi

GENERAL

Category	Track projector
Environment	Indoor
IP rating	IP40
Installation	Electrified track
Power	4.5W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	564Lm
Luminaire flux	See photometric data

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	PMMA lens, refractor
Beam angle	25°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	See drawing
Weight	0.12 Kg
Finish	RAL 9010 + gloss RAL 9005
Material	Aluminium
Rotation	360°
Tilt	+/- 90°

TECHNICAL DRAWINGS AND DETAILS

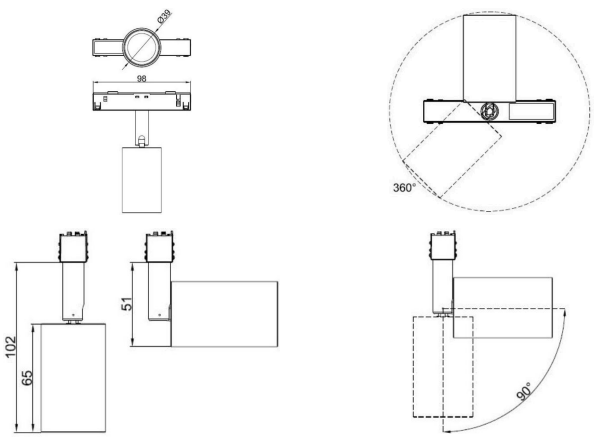

NOTES

- Tracks and drivers to be ordered separately.
- Mechanical and optical features are fully customisable on request.
- DALI 2 or Casambi dimmable on request.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: 15°, 25°, 40°, elliptical.