ZUMY M RECESSED

Recessed and gimbal lights



Fully adjustable LED luminaire, recessed in false ceilings with steel springs, whose zoom function provides concentrated, sharp and precise light emission even over long distances. Suitable for art galleries. Aluminium body. Remote driver. Very high R9 value, for naturally saturated red colour rendering.

RECESSED	IP 40 PROTECTION	CLASS III	12W POWER
3000K CCT	98 CRI	Remote DRIVER	

GENERAL

Category	LED
Environment	Indoor
IP rating	IP40
Installation	False ceiling
Power	12W
Colour temperature	3000K
Colour rendering (CRI)	98
R9	97
Source flux	1332Lm

OPTICS

Emission	Direct
LED source	LED COB
Distribution	Symmetric
Optics	Zoom
Beam angle	Variable


ELECTRICAL

Driver	Remote
Power supply	700mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	76mm
Weight	250gr
Finish	Any RAL and NCS code
Material	Aluminium
Rotation	+/- 180°
Tilt	+/- 90°

TECHNICAL DRAWINGS AND DETAILS

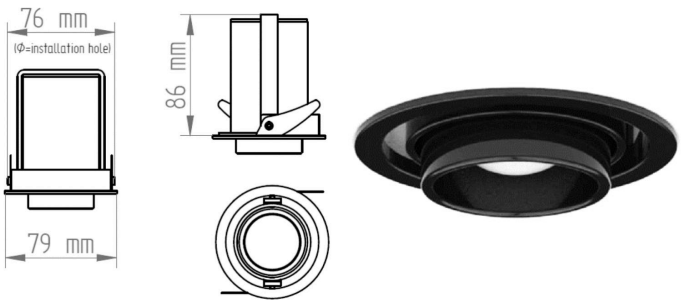

NOTES

- Dimmable with constant current driver (not included).
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Fully customisable luminaire.
- Also available in a constant voltage version.