# NOVASPOT S WIDE 220VAC FL *Recessed and gimbal lights*





Indoor LED luminaire for flush installation in false ceilings. The extremely slim body allows installation even in critical spots. Suitable for false ceiling installation using the supplied recessed housing. Magnetic fixing for quick installation. Anodised aluminium body, opal or satin PMMA cover. Integrated on-board 220Vac driver, eliminating the need for remote drivers. TRIAC dimmable.

| RECESSED | IP 40 PROTECTION | CLASS I | 4W POWER |
|---|---|---|---|
| 4000K CCT | 92 CRI | Integrated DRIVER | |

CONTROL Triac

## GENERAL

| | |
|---|---|
| Category | LED |
| Environment | Indoor |
| IP rating | IP40 |
| Installation | Recessed |
| Power | 4W |
| Colour temperature | 4000K |
| Colour rendering (CRI) | 92 |
| Source flux | 500lm |

## OPTICS

| | |
|---|---|
| Emission | Direct |
| LED source | LED array |
| Distribution | Symmetric |
| Optics | Acrylic refractive optics |
| Beam angle | Wide |


## ELECTRICAL

| | |
|---|---|
| Driver | Integrated |
| Power supply | 220 Vac |
| Insulation class | I |

## MECHANICAL

| | |
|---|---|
| Dimensions | See drawing |
| Recess cut-out | Ø50 |
| Weight | 250g |
| Finish | Aluminium |
| Material | Aluminium |

TECHNICAL DRAWINGS AND DETAILS

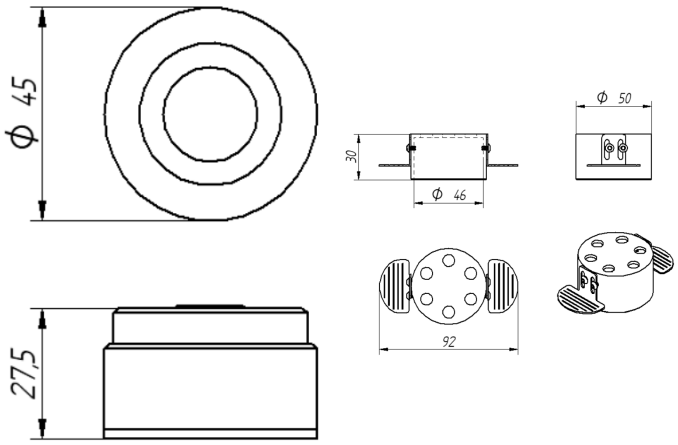


NOTES

– TRIAC dimmable.