
CHALK SPIRIT – FLAT MODULE *Linear luminaire*

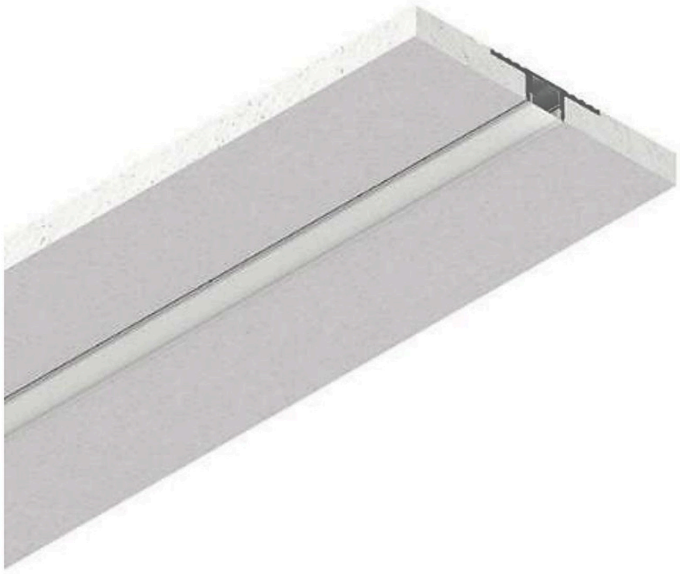

LED strip profile, for light slits in plasterboard. Body integrated in 12.5 mm thick plasterboard, heat-dissipating profile in natural anodised aluminium alloy and opal PMMA diffuser included.

LINEAR	CLASS III	≤ 24W/m	2700–4000K
		POWER	CCT

>90	175°	Remote
CRI	BEAM	DRIVER

GENERAL

Category	Linear luminaire
Environment	Indoor
Installation	In false ceiling
Power	Up to 24W/m
Colour temperature	2700K 3000K 3500K 4000K
Colour rendering (CRI)	>90
Source flux	Up to 120Lm/W

OPTICS

Emission	Direct
LED source	LED array
Distribution	Lambertian
Optics	Diffuse
Beam angle	175°


ELECTRICAL

Driver	Remote
Power supply	24Vdc
Insulation class	III

MECHANICAL

Dimensions	2000x120x12.5mm
Recess cut-out	See technical detail
Weight	3.94Kg
Material	Aluminium, plasterboard

TECHNICAL DRAWINGS AND DETAILS

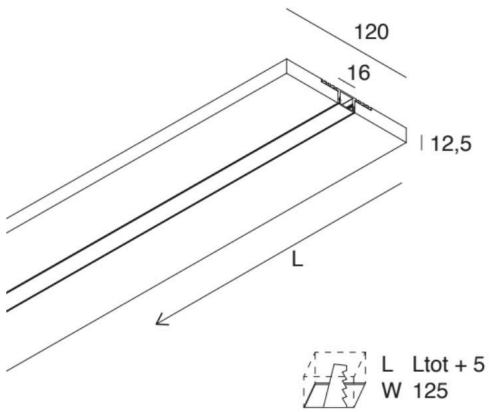

NOTES

- Dimmable with constant current driver (not included).
- LED strip and remote 24Vdc electronic driver to be ordered separately.