
ELVIS MENSOLA BIEMISSIONE CANNON *Wall light*

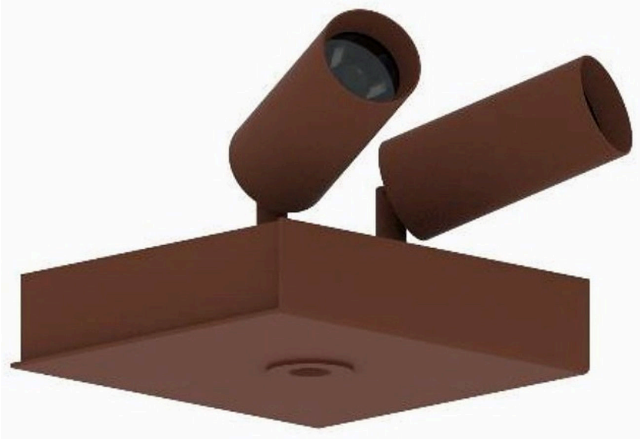

Fully customisable luminaire with triple light source: two adjustable spotlights in the upper part of the structure and a recessed spotlight in the lower part. The spotlights can be controlled separately from the recessed luminaire. Suitable for indoor wall installations.

WALL	IP 40 PROTECTION	CLASS I	12W... POWER
2700–4000K CCT	98 CRI	18–60° BEAM	Integrated DRIVER

GENERAL

Category	Wall light
Environment	Indoor
IP rating	IP40
Installation	Wall
Power	12W+12W (up) 3W (down)
Colour temperature	2700K,3000K,3500K,4000K
Colour rendering (CRI)	Up to 98
R9	Up to 97
Source flux	3540+95lm

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive PMMA lens
Beam angle	18°, 24°, 38°, 60°.


ELECTRICAL

Driver	Integrated
Power supply	230Vac
Insulation class	I

MECHANICAL

Dimensions	See drawing
Weight	600gr
Finish	Corten
Material	Aluminium
Rotation	+/- 180°
Tilt	90°

TECHNICAL DRAWINGS AND DETAILS

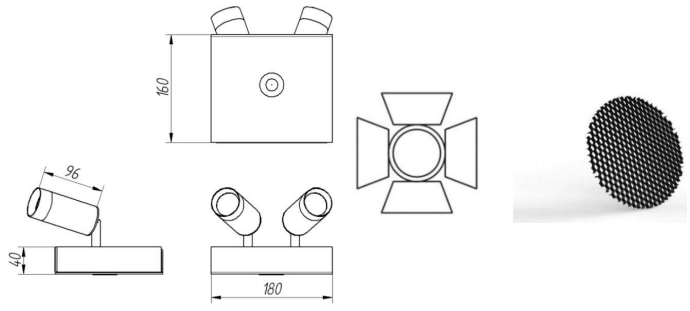

NOTES

- Mechanical and electrical features can be customised according to the customer's wishes.

ACCESSORIES AND OPTIONS

- Honeycomb anti-glare filter
- Barn doors