
OCULUS S+ FL IP65 *Recessed downlight*

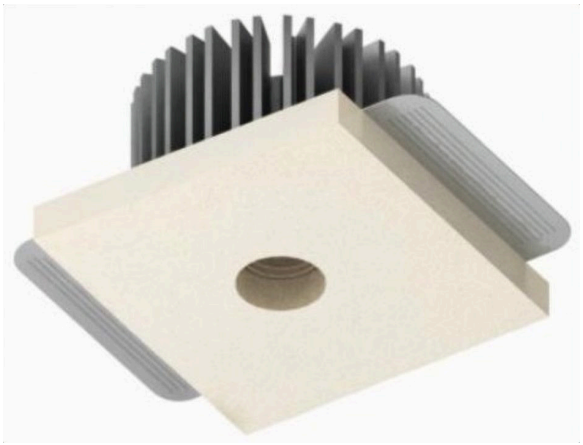

Trimless LED luminaire recessed in false ceilings. Aluminium body. Direct light. IP65 protection rating: suitable for damp environments.

RECESSED	IP 65	CLASS III	9W
	PROTECTION		POWER

2400K	90	Remote
CCT	CRI	DRIVER

GENERAL

Category	Recessed downlight
Environment	Outdoor
IP rating	IP65
Installation	Ceiling recessed
Power	9W
Colour temperature	2400K
Colour rendering (CRI)	90
Source flux	910lm (3000K) · 820lm (2400K)

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive
Beam angle	Medium


ELECTRICAL


Driver	Remote
Power supply	700mA
Insulation class	III


MECHANICAL

Dimensions	See drawing
Recess cut-out	Ø50mm
Weight	400gr
Finish	RAL9001 - paintable
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS







NOTES

- Fully customisable luminaire.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: narrow, medium, wide.

ACCESSORIES AND OPTIONS

- Honeycomb anti-glare filter