
KALLER Q-P

Outdoor and wet locations

DATASHEET BEING UPDATED

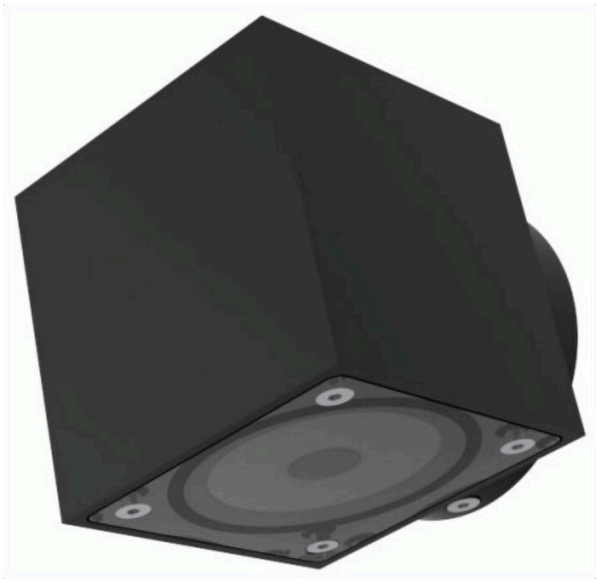

Wall or ceiling luminaires: their compact size and sharp edges make them design objects as well as lighting fixtures.

WALL	IP 65 PROTECTION	CLASS III	4W POWER

2700–4000K CCT	80–97 CRI	26–60° BEAM

GENERAL

Category	LED
Environment	Indoor
IP rating	IP65
Installation	Wall/ceiling
Power	4W
Colour temperature	2700K,3000K,3500K, 4000K
Colour rendering (CRI)	80 · 90 · 95 · 97
Luminaire flux	900lm

OPTICS

Optics	Wide
Beam angle	26°/38°/60°


ELECTRICAL

Power supply	230 Vac
Insulation class	III

MECHANICAL

Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

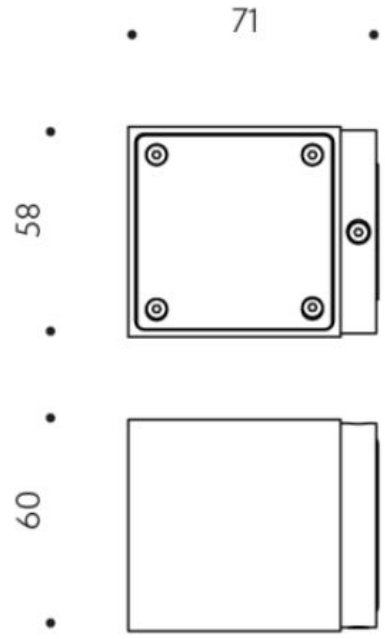

NOTES

– Dimmable with constant current driver not included.