
SF.IP – OCULUS S+ FL IP65 *Recessed downlight*

Trimless LED luminaire recessed in false ceilings. Aluminium body. Direct light.

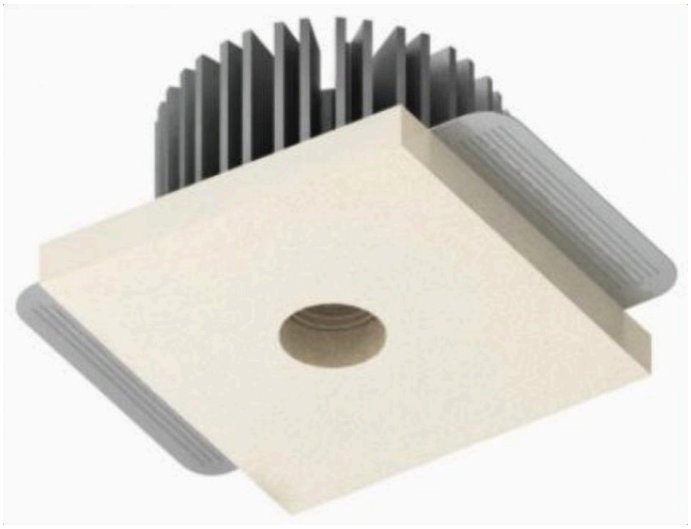

RECESSED | IP 65 PROTECTION | CLASS III | 9W POWER

2400K CCT | 90 CRI | Remote DRIVER

GENERAL

Category	Recessed downlight
Environment	Outdoor
IP rating	IP65
Installation	Ceiling recessed
Power	9W
Colour temperature	2400K
Colour rendering (CRI)	90
Source flux	910lm (3000K) · 820lm (2400K)

OPTICS

Emission	Direct
LED source	COB LED
Distribution	Symmetric
Optics	Refractive
Beam angle	Medium


ELECTRICAL

Driver	Remote
Power supply	700mA
Insulation class	III

MECHANICAL

Dimensions	See drawing
Recess cut-out	120×120mm
Weight	400gr
Finish	RAL9001 - paintable
Material	Aluminium

TECHNICAL DRAWINGS AND DETAILS

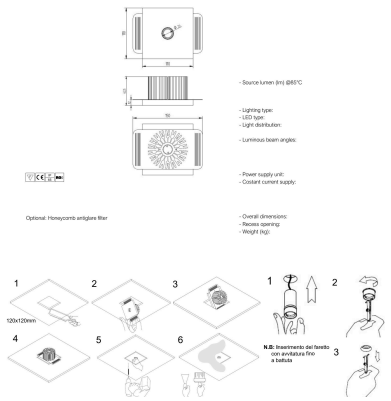

NOTES

- Fully customisable luminaire.
- Note: insert the spotlight by screwing it in until it stops.
- Available in the following colour temperatures: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available with the following beam angles: narrow, medium, wide.
- Note: minimum false ceiling height for spotlight insertion cm.

ACCESSORIES AND OPTIONS

- Honeycomb anti-glare filter